


## [2020-New-ExamsBraindump2go 300-410 Dumps PDF Free Instant Download

March/2020 New Braindump2go 300-410 Exam Dumps with PDF and VCE Free Released Today! Following are some new 300-410 Exam Questions. New Question Refer to the exhibit. A router receiving BGP routing updates from multiple neighbors for routers in AS 690. What is the reason that the router still sends traffic that is destined to AS 690 to a neighbor other than 10.222.10.1?

```
config t
flow record v4_r1
match ipv4 tos
match ipv4 protocol
match ipv4 source address
match ipv4 destination address
match transport source-port
match transport destination-port
collect counter bytes long
collect counter packets long
!
flow exporter EXPORTER-1
destination 172.16.10.2
transport udp 90
!
flow monitor FLOW-MONITOR-1
record v4_r1
exit
!
ip cef
!
interface Ethernet0/0.1
ip address 172.16.6.2 255.255.255.0
ip flow monitor FLOW-MONITOR-1
```

A. The local preference value in another neighbor statement is higher than 250.  
B. The local preference value should be set to the same value as the weight in the route map.  
C. The route map is applied in the wrong direction.  
D. The weight value in another statement is higher than 200.  
Answer: C  
New Question Which list defines the contents of an MPLS label?  
A. 20-bit label; 3-bit traffic class; 1-bit bottom stack; 8-bit TTL.  
B. 32-bit label; 3-bit flow label; 1-bit bottom stack; 8-bit hop limit.  
C. 20-bit label; 3-bit flow label; 1-bit bottom stack; 8-bit hop limit.  
D. 32-bit label; 3-bit traffic class; 1-bit bottom stack; 8-bit TTL.  
Answer: A  
New Question A network engineer is investigating a flapping (up/down) interface issue on a core switch that is synchronized to an NTP server. Log output does not show the time of the flap. Which command allows on the switch the time of the flap according to the clock on the device?  
A. clock calendar-valid  
B. service timestamps log datetime localtime show-timezone  
C. service timestamps log uptime  
D. clock summer-time mst recurring 2 Sunday mar 2:00 1 sunday nov 2:00  
Answer: A  
New Question Refer to the exhibit. An IP SLA was configured on router R1 that allows the default route to be modified in the event that Fa0/0 loses reachability with the router R3 Fa0/0 interface. The route has changed to flow through route R2. Which debug command is used to troubleshoot this issue?

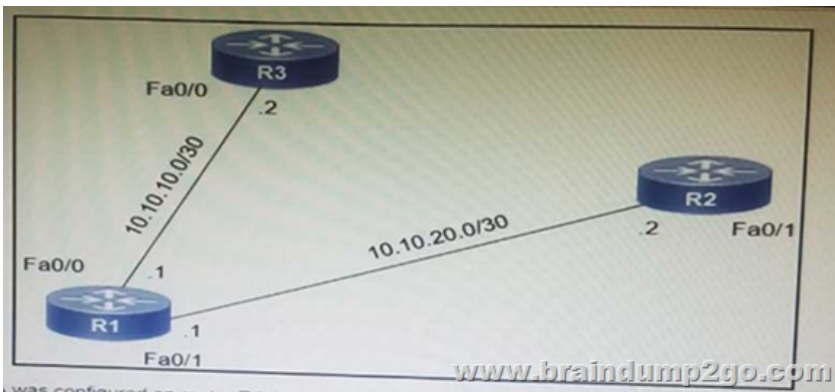

A. debug ip flow  
B. debug ip sla error  
C. debug ip routing  
D. debug ip packet  
Answer: C  
New Question Refer to the exhibit. What is the result if applying this configuration?

```
R1#show policy-map control-plane
Control Plane

Service-policy input: CoPP-BGP


Class-map: BGP (match-all)
  2716 packets, 172071 bytes
  5 minute offered rate 0000 bps, drop rate 0000 bps
  Match: access-group name BGP
  drop

Class-map: class-default (match-any)
  5212 packets, 655966 bytes
  5 minute offered rate 0000 bps, drop rate 0000 bps
  Match: any
```


A. The router can form BGP neighborships with any other device.  
B. The router can form BGP neighborships with any device that matched by the access list named "BGP".  
C. The router cannot form BGP neighborships with any other device.  
D. The router cannot form BGP neighborships with any device that is matched by the access list named "BGP".  
Answer: A  
New Question  
Refer to the exhibit. During troubleshooting it was discovered that the device is not reachable using a secure web browser. What is needed to fix the problem?

```
access-list 100 deny tcp any any eq 465
access-list 100 deny tcp any eq 465 any
access-list 100 permit tcp any any eq 80
access-list 100 permit tcp any eq 80 any
access-list 100 permit udp any any eq 443
access-list 100 permit udp any eq 443 any
```

A. permit tcp port 465.  
B. permit tcp port 443.  
C. permit udp port 465.  
D. permit tcp port 22.  
Answer: B  
New Question  
White working with software images, an engineer observes that Cisco DNA Center cannot upload its software image directly from the device. Why is the image not uploading?  
A. The device must be resynced to Cisco DNA Center.  
B. The software image for the device is in bundle mode.  
C. The software image for the device is in install mode.  
D. The device has lost connectivity to Cisco DNA Center.  
Answer: C  
New Question  
When provisioning a device in Cisco DNA Center, the engineer sees the error message "Cannot select the device. Not compatible with template.". What is the reason for the error?  
A. The software version of the template is different from the software version of the device.  
B. The changes to the template were not committed.  
C. The tag that was used to filter the templates does not match the device tag.  
D. The template has an incorrect configuration.  
Answer: C  
New Question  
Drag and drop the OSPF adjacency states from the left onto the correct descriptions on the right.

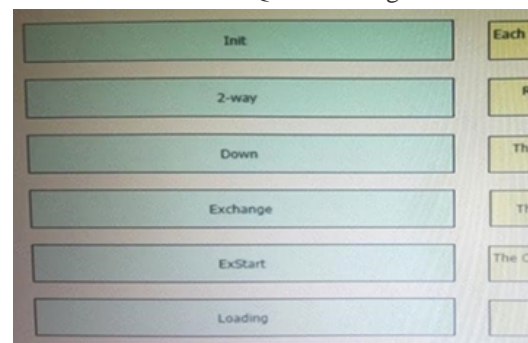

Answer:

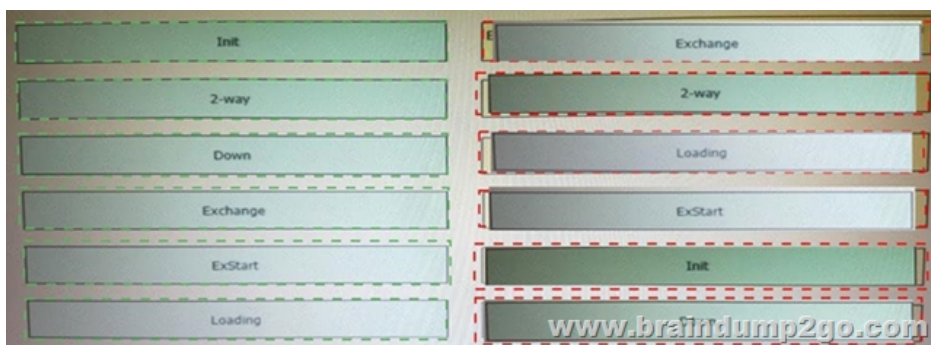

ExplanationExchange = Each router compares the DBD packets that were received from the other router2- way = Router exchange information with other routers in the multiaccess network Loading = The neighboring router requests the other routers to send missing entries Exstart = The network has already elected a DR and a backup BDR Init = The OSPF router ID of the receiving router was not contained in the hello message Down = No hellos have been received from a neighbor router New QuestionRefer to the exhibit.

```
config t
flow record v4_r1
match ipv4 tos
match ipv4 protocol
match ipv4 source address
match ipv4 destination address
match transport source-port
match transport destination-port
collect counter bytes long
collect counter packets long
!
flow exporter EXPORTER-1
destination 172.16.10.2
transport udp 90
exit
!
flow monitor FLOW-MONITOR-1
record v4_r1
exit
!
ip cef
!
interface Ethernet0/0.1
ip address 172.16.6.2 255.255.255.0
ip flow monitor FLOW-MONITOR-1
```

A router receiving BGP routing updates from multiple neighbors for routers in AS 690. What is the reason that the router still sends traffic that is destined to AS 690 to a neighbor other than 10.222.1.1 ?A. The weight value in another statement is higher than 200.B. The route map is applied in the wrong direction.C. The local preference value in another neighbor statement is higher than 250.D. The local preference value should be set to the same value as the weight in the route map.

Answer: B  
New QuestionWhich attribute eliminates LFAs that belong to protected paths in situations where links in a network are connected through a common fiber?A. Interface-dispointB. Linecard-disjointC. Shared risk link group-disjointD. Lowest-repair-path-metric

Answer: C  
New QuestionRefer to the exhibit.

```
snmp-server community ciscotest 1
snmp-server host 192.168.1.128 ciscotest
snmp-server enable traps bgp
```

Network operations cannot read or write an configuration on the device with this configuration from the operation subnet. Which two configuration fix the issue? (Choose two.)A. Modify SNMP rw permission in addition to version 1.B. Configure SNMP rw permission in addition to community ciscotest.C. Modify access list 1 and allow operations subnet in the access list.D. Configure SNMP rw permission in addition to version 1.E. Configure SNMP rw permission in addition to community ciscotest 1.

Answer: B,D  
Resources From: 1.2020 Latest Braindump2go 300-410 Exam Dumps (PDF & VCE) Free  
Share: <https://www.braindump2go.com/300-410.html> 2.2020 Latest Braindump2go 300-410 PDF and 300-410 VCE Dumps Free  
Share: <https://drive.google.com/drive/folders/1NkZ6PH5JebhsyHrMEXD3IWxkOLRjQ-B-?usp=sharing> 3.2020 Latest 300-410 Exam Questions from: <https://od.lk/fl/NDZfMTIyNTI0M18> Free Resources from Braindump2go, We Devoted to Helping You 100% Pass All Exams!