

## [2018-March-New300-180 Exam PDF 374Q Instant Download in Braindump2go[334-351

2018 March New Cisco 300-180 Exam Dumps with PDF and VCE Free Updated Today! Following are some new 300-180 Real Exam Questions: 1. |2018 Latest 300-180 Exam Dumps (PDF & VCE) 374Q&As

Download: <https://www.braindump2go.com/300-180.html> 2. |2018 Latest 300-180 Exam Questions & Answers

Download: <https://drive.google.com/drive/folders/0B75b5xYLjSSNRFPtN0xiTENBMzA?usp=sharing> QUESTION 334 You must identify and isolate traffic loss. Which option do you configure to monitor EPG-to-EPG traffic within a tenant? A. SPAN B. traffic map C. tcpdump D. atomic counters **Answer: C** QUESTION 335 Refer to the exhibit. Which description of the result is true?

```
Nexus7K-1 Config
interface loopback1
 ip address 10.100.1.1/32
 ip pim sparse-mode
 ip pim bsr bsr-candidate loopback0
 ip pim bsr rp-candidate loopback0 group-list
 224.0.11.0/24
 ip pim bsr forward listen
Nexus7K-2 Config
interface loopback01
 ip address 10.100.2.1/32
 ip pim sparse-mode
 ip pim bsr bsr-candidate loopback0
 ip pim bsr rp-candidate loopback0 group-list
 224.0.0.0/16
 ip pim bsr forward listen
```

A. Nexus7K-2 is the RP for all of the multicast addresses specified in the 224.0.11.0/24 group list. B. Nexus7K-1 is the RP for all of the multicast addresses specified in the 224.0.11.0/24 group list. C. Nexus7K-2 is the RP for all of the multicast traffic on the network. D. Nexus7K-1 is the RP for all of the multicast traffic on the network. **Answer: D** QUESTION 336 After a data center is upgraded with new Cisco Nexus switches, some of the links using multimode fiber no longer work, which type of multimode cables are valid? A. OM4 cable for 700 m at 10 Gb B. OM3 cable for 50 m at 40 Gb with QSFP BiDi C. OM4 cable for 150 m at 40 Gb QSFP BiDi D. OM2 cable for 550 m at 10 Gb **Answer: B** QUESTION 337 Refer to the exhibit. Interfaces Ethernet 7/1-8 are members of the CORE-SW1 VDC, and CORE-7700-1 is the admin VDC. Which cause of the error is likely?

```
CORE-7700-1(config-vdc)# vdc FC-CORE-SW1
CORE-7700-1(config-vdc)# allocate
7/1-8
ERROR: Ports being shared must be
been configured for fcoe sharing
```

A. The FCoE VLANs associated to Ethernet 7/1-8 must be assigned to the FC-CORE-SW1 VDC in the admin VDCs. B. Interfaces Ethernet 7/1-8 must be configured for FCoE sharing. C. All the interfaces in the FC-CORE-SW1 VDC must be configured for FCoE sharing. D. The Fibre Channel VSANs associated to Ethernet 7/1-8 must be assigned to the FC-CORE-SW1 VDC in the admin VDCs. **Answer: A** QUESTION 338 Refer to the exhibit. A user named user1 is unable to create roles. What must you do to resolve the issue?

```
no password set. local login not allowed
Remote login through RADIUS is possible


switch# show role tech-admin
Role: tech-admin
Description: Admin management group
vlan policy: permit
```

Rule	Type	Command-type	Feature
1.	permit	config	*
2.	deny	config	role
3.	permit	debug	ntp
4.	permit	exec	*

A. Assign user1 to the network-admin role.B. Assign user1 to the tech-admin role only.C. Set the user password for user1D. Allow user1 to log in locally  
**Answer: A**QUESTION 339Which tool can be used to browse the Cisco APIC Management Information Tree via a web browser?  
A. KafkaB. SparkC. MavenD. /isore  
**Answer: D**QUESTION 340Refer to Exhibit. The Cisco Nexus 5000 Series Switches fail to form an OSPF adjacency.Which option is a possible cause of the issue?



A. The interfaces are disabled.B. The network type is set to broadcastC. There is mismatched process ID. The OSPF hello timer values are mismatched.  
**Answer: C**QUESTION 341How can you identify the blade location when tracing server traffic?  
A. by performing CDP checks on the Cisco UCS Fabric InterconnectsB. by using a trace utilityC. by collecting traffic that uses a SPAN monitoring portD. by examining the interface to which the server MAC address is connected  
**Answer: A**QUESTION 342A switch is configured with the following command:  
switch(config)# aaa authentication login default group tacacs+  
What occurs when an AAA login authentication request fails to communicate with any of the servers in the group?  
A. The authentication request fails.  
B. The local database is used for authentication.C. The authentication request is successful.D. A server in another server group is used, if present.  
**Answer: A**QUESTION 343Refer to the exhibit. You fail to configure a boot from iSCSI service profile.Which action do you take to troubleshoot the issue?

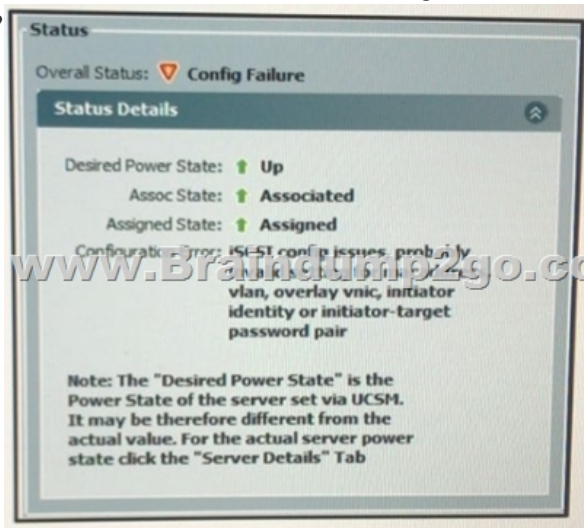

A. Attempt to ping the IP address of the iSCSI target.B. Check the LUN masking configuration.C. In the CLI of Cisco UCS Manager, verify that the blade is attached to the LUN.D. Check the native VLAN configuration on the overlay vNIC.  
**Answer: D**QUESTION 344What the default MTU size of a VMware host?  
A. 1000B. 1500C. 1550D. 9000  
**Answer: B**QUESTION 345You have a Cisco UCS Central cluster. An I/O error is detected in the shared storage. What is a possible cause of the issue?  
A. One of the Cisco UCS Central nodes is powered off.B. The wrong path selection policy is configured in VMware.C. The shared storage LUN was shared by a virtual machine other than the Cisco UCS Central cluster nodes.D. The Cisco UCS domain is not registered in Cisco UCS Central.  
**Answer: C**QUESTION 346Which option is exchanged between neighbors during OTV adjacency formation across the Layer 3 multicast network?  
A. IGMP packetsB. OTV open messagesC. L1 IS-IS Hello packetsD. OTV

adjacency packets  
**Answer: B**  
QUESTION 347 You are troubleshooting a Cisco Nexus 1000V Series Switch. Which command can you use to re-establish communication between VSM and VMware vCenter?  
A. reset  
B. connect  
C. setup  
D. reload  
**Answer: A**

QUESTION 348 You use a Cisco UCS VIC 1340 adapter. You discover that the actual vNIC order does not reflect the order specified in the connectivity policy. What must you do to change the placement order?  
A. Change adminHostPort in the vNIC policy.  
B. Change the adapter order in the connectivity policy.  
C. Remove all of the adapters and recreate all of the adapters in the required order.  
D. Change adminHostPort in the connectivity policy.  
**Answer: A**

QUESTION 349 Which two features are required to configure a blade to boot successfully from Fibre Channel? (Choose two.)  
A. LUN masking  
B. WWPN device alias  
C. boot from SAN policy  
D. SAN connectivity policy  
E. port assignment  
**Answer: B**

QUESTION 350 Which statement is true about the show cfs merge status name command?  
A. In a successful merge, all switches in the fabric are shown separately.  
B. The command shows the complete Cisco Fabric Services region database.  
C. The merge master is selected based on the highest sWWN in the fabric.  
D. In a successful merge, all switches are shown in a local fabric.  
**Answer: D**

QUESTION 351 An engineer enters the show svcs neighbors command as shown below. Which statement describes the output of the command?

```
switch# show svcs neighbors
Active Domain ID: 1030

AIPC Interface MAC: 0050-568e-58b7
IPV4 Mac: 0000-0000-0000-0000-0000-0000

Src MAC          Type Domain-id  Node-id
-----
0002-3d44-0602   VEM 1030        0302
```

A. The VSM cannot connect to the VEM.  
B. The vCenter server cannot connect to the VSM.  
C. The VSM is connected to the VEM by using an Layer 2 network.  
D. The VSM is connected to the VEM by using an Layer 3 network.  
**Answer: B**

!!RECOMMEND!!!1. |2018 Latest 300-180 Exam Dumps (PDF & VCE) 374Q&As

Download: <https://www.braindump2go.com/300-180.html> |2018 Latest 300-180 Exam Questions & Answers

Download: <https://drive.google.com/drive/folders/0B75b5xYLjSSNRFptN0xiTENBMzA?usp=sharing>