


[Oct.-2016-NewFree Braindump2go 400-351 PDF Dumps Download 165Q&As[NQ1-NQ6

2016/10 New CCIE Wireless [400-351](#): CCIE Wireless Written Exam, v3.1 Exam Questions Updated Today!Free Instant Download 400-351 Exam Dumps (PDF & VCE) 165Q&As from Braindump2go.com Today! 100% Real Exam Questions! 100% Exam Pass Guaranteed! 1.|2016/10 400-351 Exam Dumps (PDF & VCE) 165Q&As Download:<http://www.braindump2go.com/400-351.html> 2.|2016/10 400-351 Exam Questions & Answers:

<https://drive.google.com/folderview?id=0BwwEEerkugSaLSTMyUDhOZG1ET1k&usp=sharing> QUESTION 1Refer to the exhibit, based upon the given configuration which two statement are true? (choose two)




A. local RADIUS server is used
B. No password is required everyone can join wireless network
C. Users will be required to provide a username and password for authentication
D. User will be required to provide a password only order to get access
E. Remote RADIUS servers is used
Answer: AC
QUESTION 2Which two features require Network Time Protocol synchronization on the Cisco 5760 WLC?(Choose two)
A. AP CAPWAP multicast
B. SNMPv3
C. AP authentication
D. Band Select
Answer: BC
QUESTION 3Refer the exhibit. the created dynamic interfaces are bound to an interface group for a specific WLAN profile in a Cisco Wireless LAN Controller. You have noticed duplicated multicast streams on the wireless medium for the given WLAN profile. Which statement is correct?

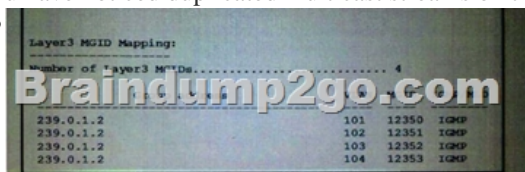

A. Global multicast mode, global IPv6 config, and multicast listener discovery snooping have not been enabled. Enable this to avoid duplicate streams.
B. Global multicast mode and internet group management protocol snooping have not been enabled. To avoid stream enable both.
C. The controller creates different multicast groups IDs for each multicast address and VLAN and as a result the upstream router sends one copy for each VLAN. Enable Multicast VLAN to avoid duplicate streams.
D. The controller always uses layer 3 multicast group 10 for all layer 3 multicast traffic sent to the access point internet group management protocol snooping should be disabled to avoid duplicate streams.
Answer: C
QUESTION 4Refer to the exhibit the autonomous AP has a corporate and guest SSID configured. The security team requested that you limit guest user traffic to DHCP, DNS, and web browsing on the AP. Which configuration best satisfies the request?



A. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80
access-list 101 deny ip any any interface dot11 radio 0 ip access-group 101 in
B. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80
access-list 101 deny ip any any interface dot11 radio 0 ip access-group 101 in
C. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80
access-list 101 deny ip any any interface fast Ethernet 0 ip access-group 101 in
D. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80
access-list 101 deny ip any any interface fast Ethernet 0 ip access-group 101 in
Answer: C
QUESTION 5Refer to the exhibit. The network operations center is using PI to collect and monitor the AVC data from a Cisco WLC. However no AVC information is showing up in Cisco PI. Based on this information from the Cisco WLC reason that Cisco PI is not showing the information is True?



A. Cisco prime does not have the correct licensing installed. B. The monitor-Name and exporter-name do not match. C. The Exporter-IP should be the IP address of the cisco WLC. D. The port number should be 9991. Answer: D

QUESTION 6 Which two statements about LAG in the Cisco wireless LAN controller running Aire OS 8.0 are true? (choose two)

A. LAG bundles all of the cisco WLC distribution system ports into a single 802.3ad port channel. B. There can be only one AP-manager interface if LAG is enabled. C. LAG configuration changes take effect immediately after they are configured. D. Channel negotiation LACP and PAgP are supported. Answer: AB

!!!RECOMMEND!!!

1. [Braindump2go|2016/10 400-351 Exam Dumps \(PDF & VCE\) 165Q&As](#)
Download: <http://www.braindump2go.com/400-351.html>

2. [Braindump2go|2016/10 400-351 Exam Questions & Answers: https://drive.google.com/folderview?id=0BwwEERkugSaLSTMyUDhOZG1ET1k&usp=sharing](#)