


2015 70-341 Dumps VCE Latest Updated By Braindump2go Today (151-160)

Braindump2go New Released 70-341 Exam Dumps Questions New Updated Today: Latest 219 Questions and Answers Explanation. Guarantee you 100% Success when you attend Microsoft MCM 70-341 Exam! We update 70-341 Exam Dumps Questions every day and you can come to download our latest 70-341 Practice Tests daily! Vendor: MicrosoftExam Code: 70-341 Exam Name: Microsoft Core Solutions of Microsoft Exchange Server 2013Keywords: 70-341 Exam Dumps,70-341 PDF Download,70-341 VCE Download,70-341 Study Guide,70-341 Study Material,70-341 Braindump,70-341 Exam Questions,70-341 Book

Compared Before Buying Microsoft 70-341 PDF & VCE!

Pass4sure	Braindump2go 100% Pass OR Money Back	TestKing
205 Q&As – Practice	219 Q&As – Real Questions	50 Q&As – Practice
\$124.99	\$99.99	\$124.99
No Discount	Coupon Code: BDNT2014	No Discount

QUESTION 151Hotspot QuestionYou have an Exchange Server 2013 organization.You enable single item recovery for all users. A user named User1 accidentally deletes important email messages sent from a user named User2. User1 reports that he cannot locate the email messages in his Deleted Items folder.You need to recover the items.What command should you run? (To answer, select the appropriate options in the answer area.)

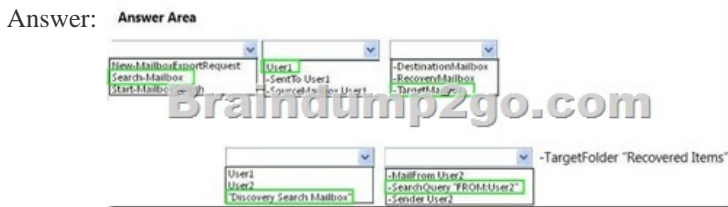


QUESTION 152Fabrikam, Ltd. has an Exchange Server organization that contains two servers. The servers are configured as shown in the following table.Recently, the internal and external namespaces named mail.fabrikam.com and autodiscover.fabrikam.com were changed to point to EX2.You configure all of the users on EX2 to access their mailbox by using Microsoft Outlook from the Internet.You enable Outlook Anywhere on EX1.You need to ensure that users who have mailboxes on EX1 can connect to their mailbox from the Internet.What should you do on EX1?

Server name	Role	Exchange Server version	Site location
EX1	Mailbox server Client Access server Outlook Transport server	Exchange Server 2010	New York
EX2	Mailbox server Client Access server	Exchange Server 2013	New York

A. Set the ExternalHostName value to NULL.B. Set the ExternalClientAuthenticationMethod value to Basic and NTLM.C. Set the IISAuthenticationMethods value to Basic and NTLM.D. Set the InternalHostName value to NULL Answer: B QUESTION 153Hotspot QuestionYour company has two main offices. One office is located in Atlanta and the other office is located in Washington.The offices connect to each other by using a dedicated WAN link.You have an Exchange Server 2013 organization that contains four servers.The servers are configured as shown in the following table.

Server name	Office	Role
EX1	Atlanta	Mailbox server
EX2	Atlanta	Client Access server
EX3	Washington	Mailbox server
EX4	Washington	Client Access server

The company opens a new office in New York. The New York office connects directly to the Washington office via a dedicated WAN link. You configure a separate Active Directory site for each office. You discover poor response times when scheduling meetings and configuring Microsoft Outlook profiles from the client computers in the New York office. You need to reduce the amount of time required to schedule meetings and to configure Outlook profiles from the computers in the New York office. What command should you run? (To answer, select the appropriate options in the answer area.)

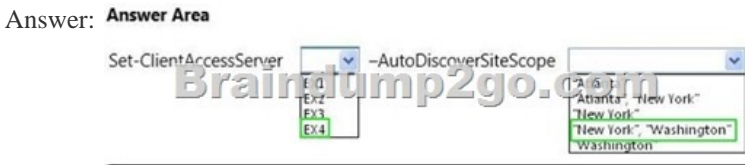

QUESTION 154 Your company has a main office and four branch offices. You have an Exchange Server 2013 organization that contains 2,500 mailboxes. An administrator plans to deploy Microsoft Lync Server 2013. You need to enable the unified contact store in the Exchange Server 2013 organization. What should you run? A. The New-CsPartnerApplication cmdlet B. The Set-ClientAccessServer cmdlet C. The Configure-EnterprisePartnerApplication.ps1 script D. The Set-AuthConfig cmdlet

Answer: C

Explanation: <http://memphistech.net/?p=280> <http://mchahla.blogspot.co.uk/2013/01/integrating-lync-server-2013-exchange.html> <http://mike-graham.co.uk/blog/2013/09/14/setting-up-lync-2013-with-exchange-2013-part-3-exchange-2013-integration>

QUESTION 155 Hotspot Question Your network contains an Active Directory forest. The forest contains a single domain. You have an Exchange Server 2013 organization named Contoso that contains a server named EX01. Split permissions are configured for the organization. You need to change the permission model to shared permissions. What command should you run? (To answer, select the appropriate options in the answer area.)



QUESTION 156 You have an Exchange Server 2013 organization that contains a database availability group (DAG) named DAG1. DAG1 has two members. You create a mailbox database copy for each database on each DAG member. You plan to implement a service level agreement (SLA) that meets the following requirements: All deleted mailboxes must be recoverable for up to six months after they are deleted. When a mailbox is recovered, the entire contents of the mailbox must be recovered. You need to recommend a solution that meets the requirements. What should you recommend? A. Get-Mailbox | Set-Mailbox -RetainDeletedItemsFor 180.00:00:00 B. Get-MailboxDatabase | Set-MailboxDatabase -MailboxRetention 180.00:00:00 C. Get-MailboxDatabase | Set-MailboxDatabase -DeletedItemRetention 180.00:00:00 D. Get-Mailbox | Set-Mailbox -AuditLogAgeLimit 180.00:00:00

Answer: B

Explanation: Set-MailboxDatabase Get-MailboxDatabase | Set-MailboxDatabase -MailboxRetention 180.00:00:00 The MailboxRetention parameter specifies the length of time to keep deleted mailboxes. To specify a value, enter it as a time span: dd.hh:mm:ss where d = days, h = hours, m = minutes, and s = seconds. For example, to specify a 15-hour interval, enter 15:00:00. The maximum length of time to retain mailboxes is 24,855 days. By default, deleted mailboxes are retained for 30 days. This attribute applies to all mailboxes in this mailbox database.

[http://technet.microsoft.com/en-us/library/bb124924\(v=exchg.150\).aspx](http://technet.microsoft.com/en-us/library/bb124924(v=exchg.150).aspx)
[http://technet.microsoft.com/en-gb/library/bb123971\(v=exchg.150\).aspx](http://technet.microsoft.com/en-gb/library/bb123971(v=exchg.150).aspx)

QUESTION 157 You have an Exchange Server 2013 organization that contains two Client Access servers and two Mailbox servers. You configure DNS round robin on the Client Access servers. All of the host (A) and alias (CNAME) records in the DNS zone are configured to have a TTL value of 10 minutes. You need to recommend a solution to fail over client connections to a Client Access server automatically if Internet Information Services (US) fails. The solution must minimize costs. What should you recommend? A. Deploy a Client Access server array. B. Reduce

the TTL values on all of the A and CNAME records to one minute.C. Deploy a hardware load balancing solution.D. Deploy Network Load Balancing (NLB) on each Client Access server. Answer: D QUESTION 158Hotspot QuestionYour network contains an Active Directory forest named contoso.com. The forest contains one domain and two sites named Site1 and Site2. Site1 connects directly to the Internet.You have an Exchange Server 2010 organization.Users access their email remotely by using Outlook Web App and Outlook Anywhere by connecting to the name mail.contoso.com.You plan to migrate to Exchange Server 2013.Exchange Server 2010 and Exchange Server 2013 will co-exist for several months during the migration. During the co-existence phase, the organization will contain seven servers. The servers will be configured as shown in the following table.

Server name	Active Directory site	Role
EX1	Site1	Client Access
EX2	Site1	Mailbox
EX3	Site1	Hub Transport
EX4	Site2	Mailbox
EX5	Site1	Client Access
EX6	Site1	Mailbox
EX7	Site2	Mailbox

You need to identify which host names must be associated to which servers. The solution must ensure that the users can access mailboxes on EX2, EX4, EX6, and EX7.What should you do? (To answer, select the appropriate target for each host name in the dialog box in the answer area.)

Answer Area

Host name	Target
Autodiscover.contoso.com	<input type="button" value="v"/> EX1 EX2 EX3 EX4 EX5 EX6 EX7
Mail.contoso.com	<input type="button" value="v"/> EX1 EX2 EX3 EX4 EX5 EX6 EX7

Answer: **Answer Area**

Host name	Target
Autodiscover.contoso.com	<input type="button" value="v"/> EX1 EX2 EX3 EX4 EX5 EX6 EX7
Mail.contoso.com	<input type="button" value="v"/> EX1 EX2 EX3 EX4 EX5 EX6 EX7

QUESTION 159A company named Fabrikam, Ltd. has an Exchange Server 2013 organization that contains two servers.The

servers are configured as shown in the following table.

Server name	Role	Exchange Server version
EX1	Mailbox server	Exchange Server 2007 Service Pack 3 (SP3)
EX2	Mailbox server Client Access server	Exchange Server 2013 Cumulative Update 1 (CU1)

You configure the internal and external namespaces named mail.fabrikam.com and autodiscover.fabrikam.com to point to EX2. You configure Outlook Anywhere on EX1 as shown in the following table.

Setting	Value
ClientCertificateName	mail.fabrikam.com
IISAuthenticationMethods	NTLM

You configure Outlook Anywhere on EX2 as shown in the following table.

Setting	Value
ExternalClientAuthenticationMethod	Basic
InternalClientAuthenticationMethod	NTLM
IISAuthenticationMethods	Basic NTLM Negotiate

You need to ensure that all of the users on EX1 can connect to their mailbox by using Microsoft Outlook from the Internet. What should you do? A. Change the authentication settings of EX1. B. Disable IPv6 on EX1. C. Change the authentication settings of EX2. D. Disable Outlook Anywhere on EX1. Answer: A QUESTION 160 You have an Exchange Server 2013 organization. You need to ensure that an administrator named Admin1 receives a daily email message that contains a log of all the Exchange Server administrative actions. Which cmdlet should you use in a scheduled task? A. Search-AdminAuditLog B. Set-AdminAuditLogConfig C. New-AdminAuditLogSearch D. Write-AdminAuditLog Answer: C Explanation:

New-AdminAuditLogSearch [http://technet.microsoft.com/en-us/library/ff459243\(v=exchg.150\).aspx](http://technet.microsoft.com/en-us/library/ff459243(v=exchg.150).aspx) After the New-AdminAuditLogSearch cmdlet is run, the report is delivered to the mailboxes you specify within 15 minutes. The log is included as an XML attachment on the report email message. The maximum size of the log that can be generated is 10 megabytes (MB). You need to be assigned permissions before you can run this cmdlet. Although all parameters for this cmdlet are listed in this topic, you may not have access to some parameters if they're not included in the permissions assigned to you. To see what permissions you need, see the "View-only administrator audit logging" entry in the Exchange and Shell infrastructure permissions topic. New-AdminAuditLogSearch -ExternalAccess \$true -StartDate 07/25/2013 -EndDate 10/24/2013 -StatusMailRecipients admin@contoso.com,pilarp@contoso.com -Name "Datacenter admin audit log" Braindump2go New Published Exam Dumps: Microsoft 70-341 Practice Tests Questions, 219 Latest Questions and Answers from Official Exam Centre Guarantee You a 100% Pass! Free Download Instantly!

Compared Before Buying Microsoft 70-341 PDF & VCE!		
Pass4sure	Braindump2go	TestKing
205 Q&As – Practice	219 Q&As – Real Questions	50 Q&As – Practice
\$124.99	\$99.99	\$124.99
No Discount	Coupon Code: BDNT2014	No Discount

<http://www.braindump2go.com/70-341.html>