

[2018-Apr.-New100% Valid 300-101 PDF and VCE Dumps 557Q Provided by Braindump2go[523-535]

2018 April New Cisco 300-101 Exam Dumps with PDF and VCE Free Updated Today! Following are some new 300-101 Real Exam Questions:1.[2018 Latest 300-101 Exam Dumps (PDF & VCE) 557Q&As

Download:<https://www.braindump2go.com/300-101.html> 2.[2018 Latest 300-101 Exam Questions & Answers Download:


<https://drive.google.com/drive/folders/0B75b5xYLjSSNeXNhZVIPaDA3dDA?usp=sharing>QUESTION 523Refer to the Exhibit. A network engineer has configured NTP on a Cisco router, but the time on the router is still incorrect. What is the reason for this problem?




A. The router is not syncing with the peer, even though the NTP request and response packets are being exchanged.
B. The router is not syncing with peer, and the NTP request and response packets are not being exchanged.
C. The router is syncing with the peer, and the NTP request and response packets are being exchanged.
D. The router is dropping all NTP packets.
Answer: D
QUESTION 524 Which technology uses the many-to-one method of mapping IP addresses?
A. static NAT
B. dynamic NAT
C. NAT-PT
D. PAT
Answer: D
Explanation: Overloading--Maps multiple unregistered IP addresses to a single registered IP address (many to one) using different ports. This method is also known as Port Address Translation (PAT). By using overloading, thousands of users can be connected to the Internet by using only one real global IP address
QUESTION 525 Which version of NetFlow?
A. all versions of NetFlow
B. NetFlow version 9
C. NetFlow version 8
D. NetFlow version 5
E. NetFlow version 8 and 9
Answer: B
QUESTION 526 What are two limitations when in use of NPTv6 for IPv6 vs IPv6 Address translation?
A. stateful address translation
B. a limit of 32 1-to-1 translations
C. lack of overloading functionality
D. identify all interfaces NAT inside or outside
E. 1-to-1 prefix rewrite
F. mismatched prefix allocations
Answer: CE
QUESTION 527 Which two statements about NTP stratum are true? (Choose two)
A. Stratum 15 indicates a device that is not synchronized
B. Stratum 1 devices receive their time from a peer that is connected directly to an authoritative time source
C. The highest stratum level a synchronized device can have is 16
D. Stratum 2 devices receive their time from a peer that is connected directly to an authoritative time source
E. Stratum 0 devices are connected directly to an authoritative time source
F. Stratum 1 devices are connected directly to an authoritative time source
Answer: BF
QUESTION 528 What is the result of the command ip flow-export destination 10.10.10.1 5858?
A. It configures the router to export cache flow information to IP 10.10.10.1 on port UDP/5858.
B. It configures the router to export cache flow information about flows with destination IP 10.10.10.1 and port UDP/5858.
C. It configures the router to receive cache flow information from IP 10.10.10.1 on port UDP/5858.
D. It configures the router to receive cache flow information about flows with destination IP 10.10.10.1 and port UDP/5858.
Answer: A
QUESTION 529 Which two options can you use to configure an EIGRP stub router? (Choose two)
A. summary-only
B. receive-only
C. external
D. summary
E. totally-stubby
F. not-so-stubby
Answer: BD
Explanation:

https://www.cisco.com/en/US/technologies/tk648/tk365/technologies_white_paper0900aecd8023df6f.htmlleigrp stub [[receive-only] || [connected] [static] [summary] [redistributed]] The following options are available:
?Receive-only: router only accepts, but does not explicitly advertise, any routes. This option may not be used in combination with any other options.
?Connected: router advertises directly-connected networks
?Static: router advertises any configured static routes
?Summary: router advertises any configured summarized routes
?Redistributed: router advertises any routes learned from another protocol, such as OSPF
The eigrp stub configuration need only be entered on the spoke routers. The hub routers determine that they are talking to a stub router by examining the TLV in the HELLO packet.
QUESTION 530 Which technology is required on an EVN trunk

interface?A. 802.1qB. NATC. VRF-LiteD. IS-IS
Answer: C QUESTION 531 Refer to Exhibit. A network engineer is unable to make VRF lite EIGRP adjacency work. There is nothing wrong with communication between R1 and R2. What command will eliminate the issue when executed on both routers?

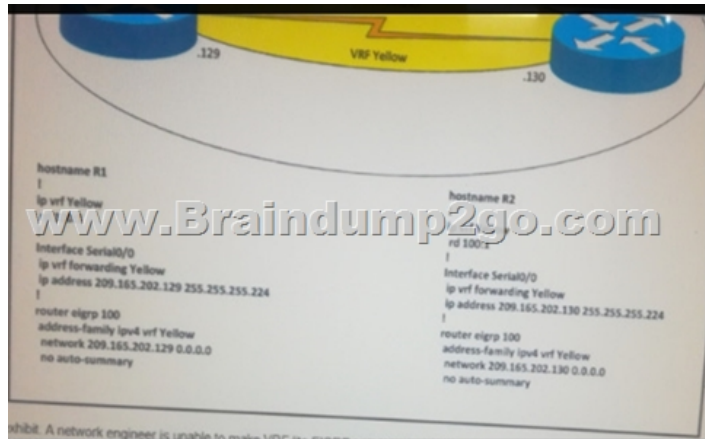

A. (config-router-af)#autonomous-system 100B. (config)#ip-multicast-routingC. (config-vrf)#route-target both 100:1D. (config-router-af)#network 209.165.202.128.0.0.0/31
Answer: A QUESTION 532 Refer to the exhibit. You have correctly identified the inside and outside interfaces in the NAT configuration of this device. Which effect of this configuration is true?



A. dynamic NATB. static NATC. PATD. NAT64
Answer: C QUESTION 533 Which condition can cause unicast reverse path forwarding to fail?
 A. split horizonB. STP convergenceC. PortFast security violationD. asymmetric routing
Answer: D QUESTION 534 Refer to the following:
 Logging Console7 Which option is one of the effects entering this command on a Cisco IOS router, with no additional logging configuration?
 A. Debug messages can be seen on the console by enabling "terminal monitor."B. Debug messages are logged only on active console connections.C. A user that is connected via SSH sees level 7 messagesD. The router can experience high CPU utilization
Answer: D QUESTION 535 Refer to exhibit. A user calls from another branch office with a request to establish a simple VPN tunnel to test a new router's tunneling capability. Based on the configuration in the exhibit, which type of tunnel was configured?

```

R1 (config-if) #interface Tunnell
R1 (config-if) #tunnel source 10.0.0.1
R1 (config-if) #tunnel destination 10.0.0.2
R1 (config-if) #ipv6 address k:k:k:k::1/64
R1 (config-if) #ipv6 ospf 1 area 1
R1 (config-if) #tunnel mode ipv6ip
R2 (config-if) #interface Tunnell
R2 (config-if) #tunnel source 10.0.0.2
R2 (config-if) #tunnel destination 10.0.0.1
R2 (config-if) #ipv6 address k:k:k:k::2/64
R2 (config-if) #ipv6 ospf 1 area 1
R2 (config-if) #tunnel mode ipv6ip
    
```

J A. PPTPB. IPsec site-to-siteC. 6to4D. EZVPN
Answer: B RECOMMEND!!!! | 2018 Latest 300-101 Exam Dumps (PDF & VCE) 557Q&As Download: <https://www.braindump2go.com/300-101.html> 2. | 2018 Latest 300-101 Study Guide Video: YouTube Video: [YouTube.com/watch?v=5NSbPNcqms](https://www.youtube.com/watch?v=5NSbPNcqms)