


Braindump2go Shares the Newly Changed Cisco 350-080 Exam Questions By Cisco 350-080 Official Exam Centre (101-110)

CISCO NEW UPDATED: New Updated 350-080 Exam Questions from Braindump2go 350-080 PDF Dumps and 350-080 VCE Dumps! Welcome to Download the Newest Braindump2go 350-080 VCE&PDF Dumps:

<http://www.braindump2go.com/350-080.html> (394 Q&As) 2015 New Updated 350-080 Exam Dumps Questions and Answers are all from Cisco Official Exam Center! Some new questions added into this new released 350-080 Dumps! Download 350-080 Exam Dumps Full Version Now and Pass one time! Vendor: CiscoExam Code: 350-080Exam Name: CCIE Data Center Written Exam [350-080 Dumps](#),[350-080 Exam Dumps](#),[350-080 Brainfump](#),[350-080 Questions](#),[350-080 VCE](#),[350-080 PDF](#),[350-080 Actual Test](#),[350-080 Study Guide](#),[350-080 Book](#),[350-080 CCIE Data Center Written Exam](#),[350-080 Test](#) **CCIE Data Center Written Exam: 350-080**

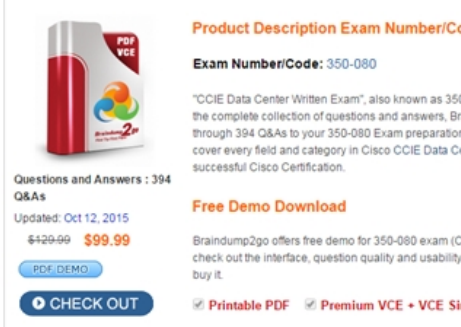

Product Description Exam Number/Code:
Exam Number/Code: 350-080

"CCIE Data Center Written Exam", also known as 350-080, is the complete collection of questions and answers. Braindump2go offers you 394 Q&As to your 350-080 Exam preparation. Braindump2go covers every field and category in Cisco CCIE Data Center Written Exam to help you pass your successful Cisco Certification.

Questions and Answers : 394 Q&As
Updated: Oct 12, 2015
~~\$429.99~~ **\$99.99**

[PDF DEMO](#)

[CHECK OUT](#)

Free Demo Download

Braindump2go offers free demo for 350-080 exam (CCIE Data Center Written Exam). Check out the interface, question quality and usability before you buy it.

Printable PDF **Premium VCE + VCE Simulator**

QUESTION 101 Which is true when describing a connection replication in Cisco ACE? A. It is not supported for SSL connections. B. It is not supported for non-SSL connections. C. It can only be configured manually. D. It has a maximum limit of 50,000 replicated connections. Answer: A

QUESTION 102 Which of the following are supported in Cisco Global Site Selector? (Choose three.) A. Full DNS functionality as a replacement of a DNS B. Responds to a DNS query with A-record C. Forwards queries to a name server D. Multiple A-records E. DHCP functionality for the local hosts Answer: BCD

QUESTION 103 KAL-AP on the Cisco ACE allows communication with Cisco ACE Global Site Selector, to report virtual IP and real server availability. Which statement is true about KAL-AP? A. It is a Cisco proprietary keepalive. B. It supports a maximum of 256 KAL-AP entries. C. It supports a maximum of 256 KAL-AP keepalives. D. It is used for both Cisco and non-cisco load balancers Answer: A

QUESTION 104 What is the purpose of this command in a Cisco Application Control Engine? switch/Admin# show np 1 me-stats "-F0 v" A. It displays the status of the internal SSL proxy structure associated with a vserver. B. It displays the crypto-related statistics for a single NP. C. It is the same output of a "show stats crypto" client/server. D. It shows details on HTTP session entries. Answer: A

QUESTION 105 Cisco UCS provides integration interfaces and protocols to support heterogeneous data center environments and supports standard monitoring and event notification systems, providing data to standard enterprise-management tools. Which two of these list the primary Cisco UCS interfaces and industry standard-based read-only interfaces? (Choose two.) A. UCS Manager XML API and UCS CLIB. B. SNMP, SMASH CLP, and CIM-XML C. UCS Manager, DCOS, and Local-mgmt D. SoL and NX-OSE. E. debug-plugin and UCS Manager GUI Answer: AB


QUESTION 106 A virtual port channel (vPC) allows links that are physically connected to two different Cisco Nexus devices to appear as a single port channel to a third device. Which are the mandatory steps for configuring vPC? (Choose six.) A. Enable feature vPC B. Define domains C. Establish peer keepalive connectivity D. Create a peer link E. Configure the peer link as a trunk port F. Create port channels and vPCs G. Define port channel load-balancing method H. Make sure configurations are consistent Answer: ABCDFH

QUESTION 107 When creating a role in a Cisco Nexus 7000 Series Switch, rules are used to define the type of operations that a role will allow the user to perform. Which two of these parameters cannot be applied as a rule? (Choose two.) A. port-profile B. command C. access-list D. feature-group E. OID Answer: AC

QUESTION 108 Overlay Transport Virtualization (OTV) overlay interface is a logical multiaccess and multicast-capable interface that must be explicitly defined by the user and where the entire OTV configuration is applied. Which statements are true about OTV overlay interface? (Choose two.) A. When an OTV edge device receives a Layer 2 frame destined for a remote data center site, the frame is logically forwarded to the overlay interface. B. The OTV edge device performs the dynamic OTV encapsulation on the Layer 2 packet and sends it to the join interface toward the routed domain. C. When the OTV edge device receives a Layer 2 frame destined for a remote data center site, the frame is logically forwarded to the join interface. D. The OTV edge device performs the dynamic OTV encapsulation on the Layer 2 packet and sends it to the overlay

interface toward the routed domain. Answer: AB QUESTION 109 Refer to the exhibit. The network administrator is seeing N7K-1 having issues with VLAN 11, and interface VLAN 11 is resetting, causing frequent HSRP state changes. Which two actions would reduce HSRP state changes? (Choose two.) A. On N7K-1, configure the HSRP extended hold timer to 180, extending the HSRP hello message hold time. B. On N7K-2, configure the HSRP extended hold timer to 180, extending the HSRP hello message hold time. C. On N7K-1, configure the pre-empt delay minimum to 180 in order to delay N7K-1 from taking over as the HSRP active router. D. On N7K-2, configure the pre-empt delay minimum to 180 in order to delay N7K-2 from taking over as the HSRP active router. E. On N7K-2, increase the HSRP priority to 150. F. On N7K-2, decrease the HSRP priority to 50. Answer: CE QUESTION 110 Overlay Transport Virtualization (OTV) join interface is used to source the OTV encapsulated traffic and send it to the Layer 3 domain of the data center network. Which statements are true about OTV join interface? (Choose three.) A. Join interface is a Layer 3 entity, and with the Cisco NX-OS release 6.0, it can only be defined as a physical interface, physical subinterface, Layer 3 port channel, or Layer 3 port channel subinterface. B. A single join interface can be defined and associated with a given OTV overlay. C. Multiple overlays can also share the same join interface. D. Join interface can be a loopback interface. E. The join interface is a Layer 3 entity that can be defined as a physical interface but not as a logical one. Answer: ABC Latest 350-080 Questions and Answers from Cisco Exam Center Offered by Braindump2go for Free Share Now! Read and remember all Real Questions Answers, Guaranteed Pass 350-080 Real Test 100% Or Full Money Back!

CCIE Data Center Written Exam: 350-

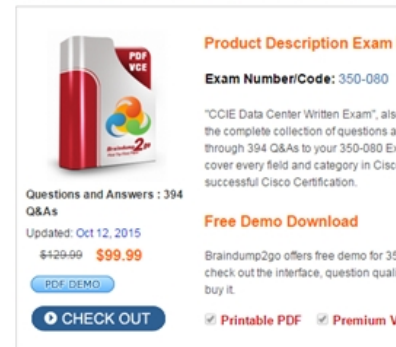

Product Description Exam

Exam Number/Code: 350-080

"CCIE Data Center Written Exam", also the complete collection of questions and answers through 394 Q&As to your 350-080 Exam cover every field and category in Cisco successful Cisco Certification.

Free Demo Download

Braindump2go offers free demo for 35 minutes. You can check out the interface, question quality, and buy it.

Printable PDF Premium V

Questions and Answers : 394 Q&As
Updated: Oct 12, 2015
~~\$429.99~~ **\$99.99**
[PDF DEMO](#)
[CHECK OUT](#)

FREE DOWNLOAD: NEW UPDATED 350-080 PDF Dumps & 350-080 VCE Dumps from Braindump2go:
<http://www.braindump2go.com/350-080.html> (394 Q&A)